


Streets/Sidewalks Proposed for Improvement in Phase VI Completed and Planned for Phases V and VI

Streetscape Program – ADA Sidewalks and Corners Completed and Planned for Phases V and VI

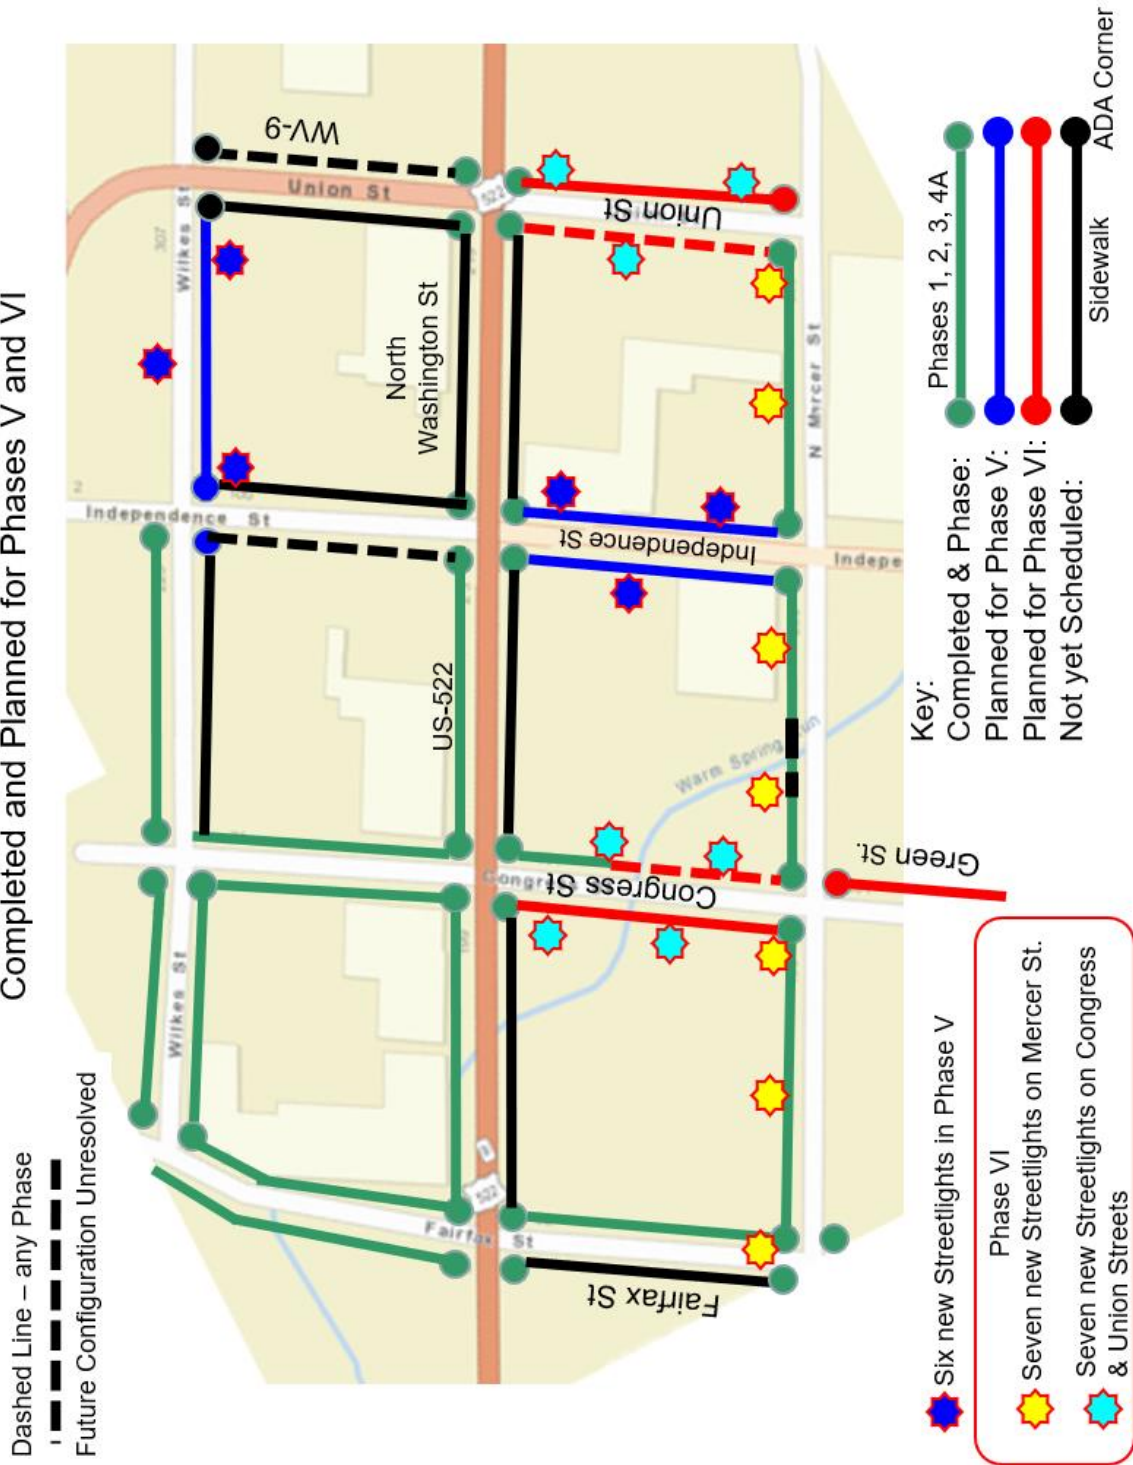


Streets/Sidewalks Proposed for Improvement in Phase VI Planned for Phase VI

Streetscape Program – ADA Sidewalks and Corners Planned for Phase VI

Dashed Line – Phase VI

Future Configuration Unresolved

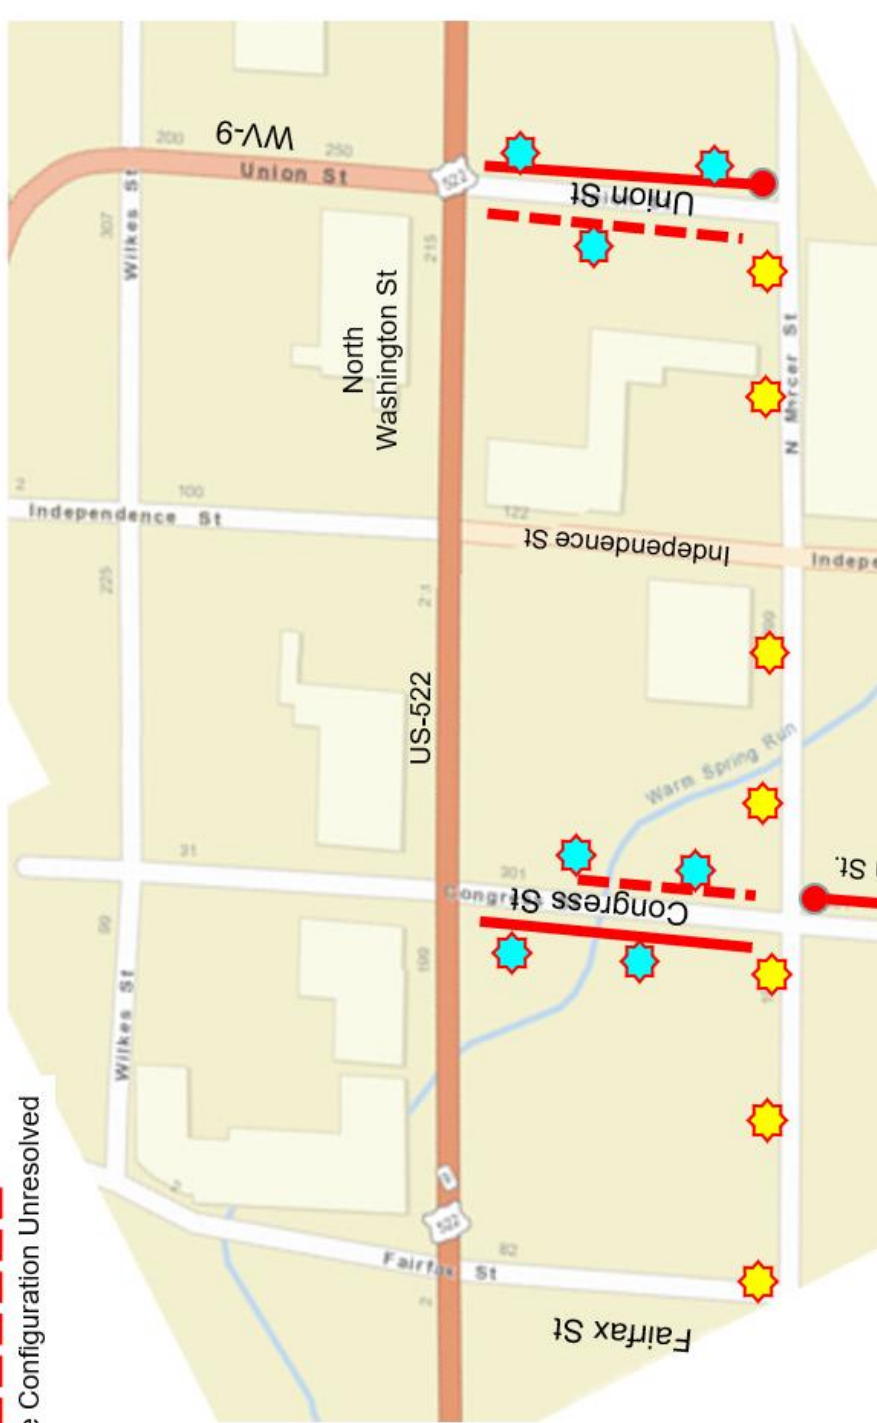

Phase VI

Seven new Streetlights on Mercer St.

Seven new Streetlights on Congress & Union Streets

Key:

Planned for Phase VI:

Sidewalk

ADA Corner

Streets/Sidewalks Proposed for Improvement in Phase VI




Congress St

South Side looking West between Warm Springs Run bridge and Mercer St. No ADA-compliant sidewalk. Need approx. 200 ft of new sidewalk and curb and ADA-compliant ramps to/from the bridge. Street drainage issues also in this area. Two new streetlights on this side of street.

Congress St

North Side between Warm Springs Run bridge and Mercer St. No ADA-compliant sidewalk on this side. Drainage issues. Uncertain ADA-compliant bridge crossing to existing Library Sidewalk. Need approx. 110 ft. Two new streetlights on this side of street.

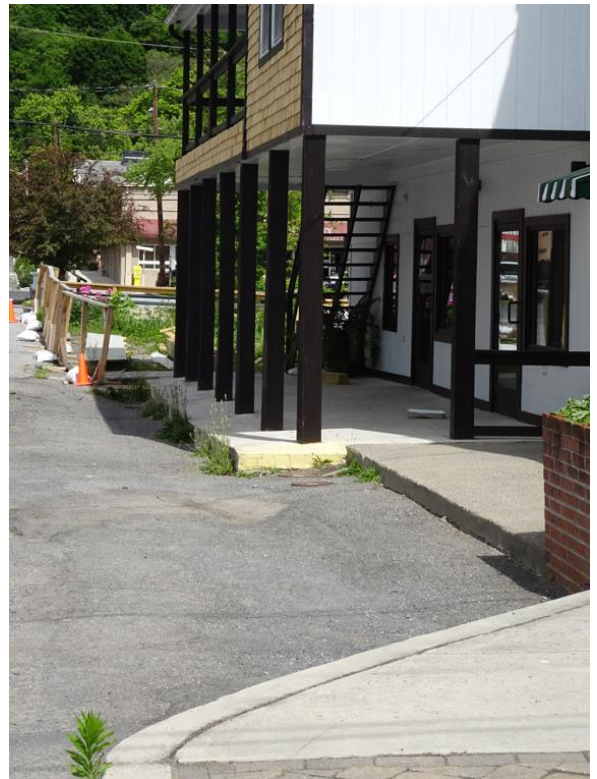

Congress St

North Side looking East between Mercer and Green Streets. Need curbing and ADA compliant sidewalk and corner ramps. Approx 180 ft of sidewalk and two simple concrete corner ramps needed.

Streets/Sidewalks Proposed for Improvement in Phase VI



Union St

North Side looking West between Mercer and North Washington St (US-522). Sidewalk and ramp to Mercer St not ADA-compliant. Drainage issues near Mercer St. Need approx 105 ft of new sidewalk and curb and 1 ADA ramp between funeral home pull-in and Mercer St. Two new streetlights on this side of street.

Union St

South Side looking West between Mercer and North Washington St (US-522). Need ADA-compliant sidewalk and curb and appropriate driveway and parking lot aprons. Need approx. 235 ft of new ADA compliant sidewalk and curb. Need connection of existing/new drains to the Run to reduce ponding in the Mercer St and Union St intersection. One streetlight on his side of street.



Streets/Sidewalks Proposed for Improvement in Phase VI



Mercer Street

West Side looking southwest between Union and Fairfax Streets. Need to complete streetlights. Conduit installed in Phase II. Need wiring from power enclosure in Library Parking lot or other TBD connection designed for Phase V to seven new streetlights along the west side of Mercer St. ADA-compliant sidewalk and corner ramps are in place along these blocks of Mercer St. Total wiring run: approx. 950 ft along sidewalk – conduit is supposed to be already installed under the current sidewalk.